

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 102 409 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
23.05.2001 Bulletin 2001/21

(51) Int Cl.7: **H04B 1/04**, H04L 27/04,  
H04L 27/20, H04L 27/26,  
H03F 3/217

(21) Application number: **99850172.0**

(22) Date of filing: **18.11.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

• **Fonden, Tony**  
**16371 Spanga (SE)**  
• **Dalipi, Spendim**  
**19142 Sollentuna (SV)**

(71) Applicant: **TELEFONAKTIEBOLAGET LM**  
**ERICSSON**  
**126 25 Stockholm (SE)**


(74) Representative: **Sandström, Staffan Sven**  
**Bergenstråhle & Lindvall AB,**  
**P.O. Box 17704**  
**118 93 Stockholm (SE)**

(72) Inventors:  
• **Hellberg, Richard**  
**14147 Huddinge (SE)**

(54) **Method and apparatus for generating a RF signal**

(57) The invention is concerned with a method of generating a high-power modulated radio-frequency signal from a low- or medium frequency information signal by pulse-forming of the information signal by means of a quantifier to form a digital signal having discrete signal values, generating one or more carrier waves of radio frequency, amplification by means of an amplifier comprising switches into a switched radio-frequency signal carrying the information, the switching events be-

ing controlled by the information content of the digital signal, and achieving the desired signal by means of a filter. The method is characterized in the carrier waves are generated by means of alternating radio-frequency voltages and that the amplification is performed by connecting the switches to the alternating carrier voltages, thus causing mixing of the digital signals with a corresponding carrier signal, in accordance with a given information content of the digital signal. The invention is also concerned with an apparatus to carry said method.

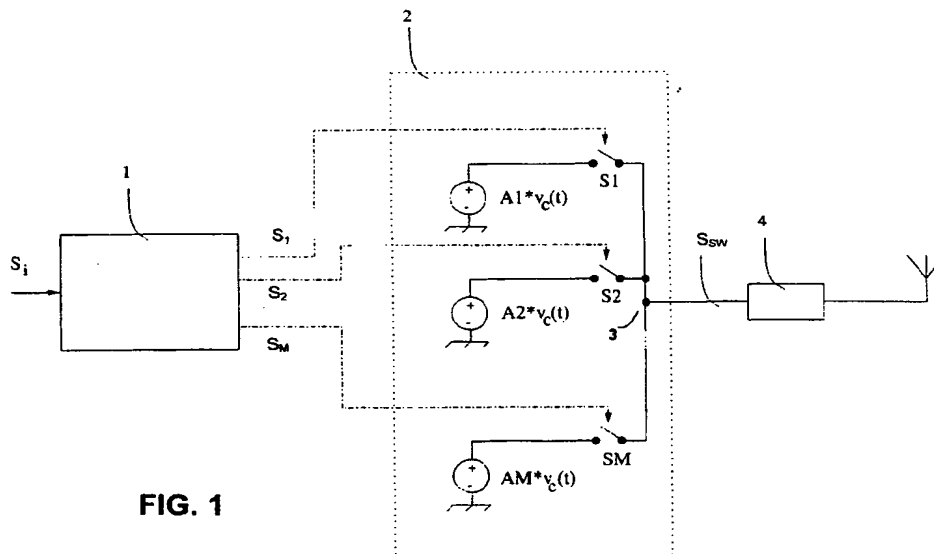

**FIG. 1**

## Description

### TECHNICAL FIELD

[0001] The invention is concerned with a method and apparatus of generating a modulated RF signal. It is especially concerned with methods and apparatuses for modulation and amplification of a low- or medium-frequency information signal to a high-power radio frequency signal.

### BACKGROUND ART

[0002] In a radio base station, there is a need for a high-power amplifier in the transmitter section to provide each radio channel with enough power to reach the outer limits of the cell which the base station is covering.

[0003] Traditionally there has been a trade-off between efficiency and linearity in radio frequency (RF) power amplifiers. E.g. amplifiers of C-type are high efficient but has an insufficient linearity, while e.g. A-type amplifiers are very linear but are low-efficient.

[0004] The development in radio communication during the recent years has, however, created an increased need for linear high-power RF amplifiers. One reason for this is the increased use of modulation schemes with time-dependent envelope, like QAM (Quadrature Amplitude Modulation), OFDM (orthogonal frequency division modulation), and CDMA (Code Division Multiple Access). Another reason is the trend towards multi-carrier radio (MCR).

[0005] When the same amplifier is used for simultaneous amplification of several information signals modulated on different carrier waves or when linear modulation is used, such as QAM, high linearity is required, because in this case it is essential that all phase and amplitude positions of the signal components involved are maintained in the amplification, because if many carriers are amplified in a single amplifier, the envelope of the total signal will be time-dependent even if the individual signals are not. If linearity is not achieved, intermodulation between the signal components might occur or the spectrum of the amplified signal sum might broaden, with the risk of interference with signals on other channels.

[0006] It has therefore been particularly problematic to find solutions for e.g. MCR base stations maintaining high efficiency due to the very stringent linearity requirements at the same time as high power is needed. Also the relatively large bandwidth makes a solution for this case particularly difficult.

[0007] The Swedish patent 507 373 of the applicant presents a method for generating a moderately wide-band (i.e. including a MCR signal) high-power RF signal with high efficiency and linearity. In this method, a sigma-delta modulator is used to generate a digital signal from an information signal followed by up-mixing and subsequent switching and band-pass filtering. The sig-

ma-delta modulation transforms the analog (or very multi-level digital) signal to a signal containing only M (preferably, but not necessarily, equally spaced) levels by a quantization process. The so called quantization noise generated in this process is then rejected by a band-pass filter. The amplification is provided by the switching process. It works so that the input of the band-pass filter is connected to M different constant electrical potentials via M switches. At a given time, one and only one switch is closed, and all the others opened. The digital control signal (the digitally up-mixed sigma-delta coded base-band signal) determines which switch is closed.

[0008] If ideal switches (and an ideal band-pass filter) are used, the amplifier will have 100% efficiency and linearity. Real switches are however not ideal and therefore they will dissipate power and 100% efficiency is not obtained. Power will be dissipated due to voltage-drop across the closed switch and leakage-current through the opened switch.

[0009] Furthermore, the switches have a finite transition time between the closed and opened states. This will lead to the problem of switching transients. If, during some period of time during the switching transient, two switches are simultaneously in a low impedance state, then an almost short-circuited power supply has appeared.

[0010] If, on the other hand, during a switching transient, all switches are simultaneously in a high-impedance state, then a voltage transient will be created by the band-pass filter. The band-pass filter must have a high input impedance for out-of-band signals. For this reason it can be considered as a constant current generator during the short interval of time of a switching transient. This constant current passes the high-impedance switches, creating a high-voltage transient. This dissipates transient power, may create non-linearities, and even degrade the life-time of the switches. It will also be more difficult to get the required selectivity from the band-pass filter since it will see a time-varying impedance.

[0011] To reduce the transient problems, one could try to use a faster switch. However, there is often a trade-off between speed, the conductivity of the closed switch (for a given minimum "off-resistance" in the opened state), and the required control-signal power. Thus, small transient losses may imply, e.g., higher ohmic losses in the steady-state "closed" state (or higher control-signal power).

[0012] The object of the invention is to overcome the transient problems when a high-power RF signal is generated by means of quantization and switching.

### SUMMARY OF THE INVENTION

[0013] The method of the invention of generating a high-power modulated radio-frequency signal from a low- or medium frequency information signal is carried out by pulse-forming of the information signal by means

of a quantifier to form a digital signal having discrete signal values, generating one or more carrier waves of radio frequency, amplification by means of an amplifier comprising switches into a switched radio-frequency signal carrying the information, the switching events being controlled by the information content of the digital signal, and achieving the desired signal by means of a filter. The method is characterized in that the carrier waves are generated by means of alternating radio-frequency voltages and that the amplification is performed by connecting the switches to the alternating carrier voltages, thus causing mixing of the digital signals with a corresponding carrier signal, in accordance with a given information content of the digital signal.

[0014] The apparatus of the invention for generating a high-power modulated radio-frequency signal, comprises a quantifier for pulse-forming of an information signal to form a digital signal having discrete signal values, a radio-frequency carrier wave generator, an amplification unit comprising switches for achieving a switched radio-frequency signal carrying the information, the switches being controlled by the information content of the digital signal, and a filter for achieving the desired signal. The apparatus is characterized in that, the switches are connected to alternating radio-frequency carrier voltages generated by the carrier wave generator to cause mixing of the digital signals with a corresponding carrier signal, in accordance with a given information content of the digital signal.

[0015] The base-band signal (low- or medium frequency signal) can be analog or digital, simple or quadrature shifted into two signal components.

[0016] The switching transient problem is solved in the invention by connecting the switches to alternating "carrier" voltages instead of to constant ("DC") voltages as in the mentioned Swedish patent. The solution of the invention also lowers the switching frequency facilitating lower power for the control of the switches.

[0017] The variation of the carrier voltage can have different forms. If the carrier voltage is sinusoidal and varies between a top + level and a bottom minus level, the carrier voltage has a zero crossing at regular intervals in time (i.e. it has momentarily the value zero volts). If the instants in time for the switching are chosen to coincide with the zero crossings, no switching-transient problems exist as is explained in the following.

[0018] Assuming a switching event in an apparatus of the invention with two switches, where one of the switches is closed and the other open. If the switching is performed so that the second switch is closed slightly before the first switch is opened, both switches are momentarily closed at the transient moment. In the invention, this will not short-circuit the "power supply" (represented by the carrier generator in the invention), since the timing for the switching event has been chosen to coincide with the zero-crossing of the carrier voltage, at which moment there is no power supply. In such a switching strategy, the band-pass filter will at all times

be connected to a low impedance (one or both switches are closed).

[0019] In addition to solving the switching-transient problem, the invention also normally gives a lower switching-frequency (i.e. the time interval between successive switching events is longer). In the sigma-delta based RF amplifier of prior art, the switching frequency is typically equal to twice the "carrier" frequency. In the invention, it is equal to the output sampling frequency of the quantifier, (i.e. twice the base-band-width times the oversampling ratio, plus some guard interval), since in the invention the mixing of the carrier wave and the information signal (the coded base band signal) takes place at the switching event.

[0020] Switches dissipate control-signal power. A bistable switch dissipates control signal power only when changing from one state to the other (closed to opened, opened to closed). For a quasi-bistable switch, this is the case to a good approximation. Thus, if bistable or quasi-bistable switches are used, the required control signal power is proportional to the switching frequency. Because of the lower switching-frequency of the apparatus of the invention (equal to the output sampling frequency of the quantizer), it thus requires less power for the control of the switches, and give a higher efficiency amplifier.

[0021] The invention is of benefit in all kinds of transmitters where the signal has a time-dependent envelope. This includes in particular radio base stations using the MCR concept, but also handsets for various standards, wireless local area (WLAN) modems, etc.

[0022] In the following an example of the invention is described by means of two figures. The intention is not to restrict the invention to the details of these embodiments, the scope of which invention is defined by the claims.

## BRIEF DESCRIPTION OF DRAWINGS

[0023] Figure 1 is a schematic view of the general principle of the invention.

[0024] Figure 2 is a more detailed example of the invention.

## DETAILED DESCRIPTION

[0025] In the embodiment of figure 1, an incoming low-frequency or medium-frequency (base-band) information signal  $S_i$  is quantified in a quantifier 1 to generate a digital signal with  $M$  discrete signal values  $S_M$  (i.e.  $S_1, S_2, S_3$  etc.). The digital signal represents a version of the information signal which is sampled  $f_s$  (sample frequency) times per second. The values of the digital signal comprise one or more bits and have thus two or more signal values.

[0026] The quantifier 1 is for example a sigma-delta modulator, the principle of which is explained in SE patent 507 373. A thorough introduction to the sigma-delta

modulator can be found in Norsworthy, S.R., Schreier, R., Temes, G.C. (eds); 1997; "Delta-Sigma data converters - theory, design, and Simulation", IEEE Press (ISBN 0-7803-1045-4).

**[0027]** The basic principle of the sigma-delta modulator is that, to the input, there is lead a low-rate sample stream of the information signal (which is analog or it is digital with a large number of quantization levels, i.e. where each sample has a large number of bits). At the output, there is a smaller number of bits and a higher sampling frequency. The number of bits at the output is often the lowest possible, i.e.  $M = 2$  (one bit), in which case, there are only two quantization levels, e.g. -1 and +1. The reduction of the number of bits in the sample stream will cause distortion. The distortion can be approximated as "noise", so called quantization noise, which is not forwarded to the antenna at the end.

**[0028]** The digital signal  $S_M$  is lead to a given switch  $S_1, S_2, \dots$  or  $S_M$  of a switching unit 2, in accordance with the value of the signal. A given value of the digital signal  $S_M$  corresponds to a given switch to be closed. Different coding methods can be used to express the value of  $M$ . In one method, switch  $S_1$  is chosen, when the value  $M$  of the digital signal  $S_M$  is 1, and so on. A switched signal  $S_{sw}$  is achieved from the digital signal  $S_M$  so that the  $M$  switches are regulated in accordance with the information content in the digital signal,  $S_M$ , a given information content resulting in a given switch to be closed. One and only one switch at a time is closed (except possibly for a short period of time during a switching transient when two switches might simultaneously be closed).

**[0029]** The power of the switched signals depends on the time-dependence of the carrier wave voltage and an (amplitude) amplification is achieved when a given information content is given a certain carrier wave of a given amplitude.

**[0030]** The switching unit 2 thus performs both mixing and amplification of the  $S_M$  signal. All switches  $S_1 - S_M$  are connected to their respective carrier generators and to a common output 3. The carrier amplitudes are denoted by  $A_1, A_2, \dots, A_M$ , and its generic time-dependence by  $v_c(t)$ , the carrier wave voltage being a function of the time. The carrier wave functions can thus have the forms  $A_1 \cdot v_c(t), A_2 \cdot v_c(t), \dots, A_M \cdot v_c(t)$ . When a given switch is closed, its carrier wave becomes available resulting in an amplified information signal of a given value. The control signal (information signal) has to be handled so that there are never two switches simultaneously open.

**[0031]** In the simplest case  $v_c$  is sinusoidal ( $v_c(t) = \cos(2\pi f_{\text{carrier}} t)$ ). The values of the amplitudes should coincide with the output levels of the sigma-delta modulator. If the sigma-delta modulator outputs  $N$ , then switch number  $S_N$  should be closed and all the others opened, and so on.

**[0032]** The switching unit 2 thus converts the digital signal to a switched radio-frequency (RF) signal  $S_{sw}$  carrying the information and from which a desired part can be taken by filtering.

**[0033]** The generation of the carrier waves of radio-frequency is made in accordance with known methods. The easiest way is to generate a sinusoidal carrier. The generation of a non-sinusoidal carrier is more complex, but has that advantage it is possible to choose the carrier to stay close to zero for some finite time-interval around the switching events.

**[0034]** The switching event can always be chosen to take place at a zero-crossing, if the carrier frequency is a multiple of the output sampling frequency of the quantifier (e.g. a sigma-delta modulator), even if the carrier voltage is not sinusoidal. It is possible to choose the frequencies (the harmonic and subharmonic contents) of a non-sinusoidal carrier so that it stays close to zero for some time-interval around the switching events.

**[0035]** If the carrier wave is sinusoidal, the modulated digital signal will be transposed so that a base-band frequency component of  $F_b$  will end up at  $F_c - F_b$  and  $F_c + F_b$ , where  $F_c$  is the carrier frequency. A band-pass filter 4 is placed after the switches that rejects the unwanted one of these side bands (either  $F_c - F_b$  or  $F_c + F_b$  for all  $F_b$ -s in the base band). The band-pass filter 4 also rejects the (frequency transposed) quantization noise from the quantifier.

**[0036]** Figure 2 shows explicitly a possible implementation of a two-level system ( $M=2$ ). This implementation uses a (supposedly ideal) transformer 5 to generate the two amplitudes of the carrier signal. The switch  $S_1$  is thus connected to an electric potential with respect to the ground of  $v_c(t)$  while  $S_2$  is connected to  $-v_c(t)$ . Thus, when switch  $S_1$  is closed and  $S_2$  opened, the input of the band-pass filter 4 is connected to  $+v_c(t)$ , and to  $-v_c(t)$  when  $S_2$  is closed and  $S_1$  open. When the sigma-delta modulator outputs +1, switch  $S_1$  is closed and  $S_2$  opened and vice versa when it outputs -1. The frequency divider 6 is a control unit for adjusting the frequencies and the inverter 7 regulates the switches in accordance with the values +1 or -1. The other reference numbers 1, 2, 3 and 4 are equal to those used in figure 1.

**[0037]** In an other embodiment of the invention, not illustrated, instead of rejecting the unwanted side-bands by the band-pass filter, one could alternatively use a cancellation arrangement based on quadrature signals. In this case, two modulated base-band signals are used, identical as to a 90 degrees phase-difference. These two signals control the switches in two different mixers. The mixers are fed with carriers of 90 degrees phase difference. The signals from the mixers are added either before or after the band-pass filters. Also in this arrangement, the (frequency transposed) quantization noise from the sigma-delta modulator is rejected by the band-pass filter(s).

**[0038]** A slightly different variant of this alternative would be to neither reject or to cancel either of the side-bands, but to use them as two linearly independent channels, and to use them as in the traditional quadrature phase I and Q arrangement. Also in this arrangement, the frequency transposed quantisation noise from

the modulator is rejected by the band-pass filter(s).

[0039] If the carrier is not sinusoidal and contains more than one frequency component, replica of the modulated base-band signal will fall onto the band-pass filter's passband. However, if all the frequency components of the carrier are integer multiples of the sampling frequency of the quantifier, all these components will be aligned so that a particular base-band frequency component will be mapped onto the same RF frequency for all the replica. The occurrence of a non-harmonic carrier will therefore not create any distortion in the resulting RF signal. The carrier may contain both harmonics and subharmonics of its fundamental frequency as long as all of them are integer multiples of the sigma-delta output sampling frequency.

[0040] While any number M of equidistant or non-equidistant "carrier" amplitudes might be used, the most practical arrangement would probably be to use only two levels (as in the embodiment of figure 2) or three levels.

[0041] A well-known fact of sigma-delta modulators is that a two-level system is less sensitive to mismatches in the components. Thus, an amplitude error, e.g. in one or both of the two carrier amplitudes switched between, does not introduce any distortion. In a three- or many level system, however, distortion is created by a deviation from its normal value in one of the carrier amplitudes switched between.

#### Claims

1. Method of generating a high-power modulated radio-frequency signal from a low- or medium frequency information signal by

- a) pulse-forming of the information signal by means of a quantifier to form a digital signal having discrete signal values,
- b) generating one or more carrier waves of radio frequency,
- c) amplification by means of an amplifier comprising switches into a switched radio-frequency signal carrying the information, the switching events being controlled by the information content of the digital signal,
- d) achieving the desired signal by means of a filter,

**characterized** in that the carrier waves are generated by means of alternating radio-frequency voltages and that the amplification is performed by connecting the switches to the alternating carrier voltages, thus causing mixing of the digital signals with a corresponding carrier signal, in accordance with a given information content of the digital signal.

2. Method of claim 1, **characterized** in that the alternation of the carrier voltages is performed so that

the frequency/frequencies of the carrier waves generated is/are a multiple/multiples of the output sampling frequency of the quantifier.

3. Method of claim 1 or 2, **characterized** in that the alternation of the carrier voltage is performed so that the resulting carrier wave is a sinusoidal signal.
4. Method of claim 3, **characterized** in that the filter is a band-pass filter rejecting distortion caused by the amplification and the unwanted side band of the signal from step c).
5. Method of any of claims 1 - 4, **characterized** in that the instants in time for the switching events are chosen to coincide with the moment at which the carrier wave is zero or close to zero to avoid energy losses during the switching transients.
6. Method of any of claims 1 - 5, **characterized** in that the switching frequency is equal to the output sampling frequency of the quantifier.
7. Method of claim 1 or 2, **characterized** in that the carrier voltage is non-sinusoidal in such a way that it is a sum of frequency components, where all the components have frequencies that are integers of the output sampling frequency of the quantifier.
8. Method of claim 7, **characterized** in that the carrier voltages are chosen so that they stay close to zero for the time-interval around the switching events.
9. Method of claim 1 or 2, **characterized** in that the information signal is quadrature shifted in two components, whereby two digital signals are formed in step a) controlling the switches in two different amplifier/mixers of the invention, which are fed with carriers of 90 degrees phase-difference.
10. Method of claim 1 or 2, **characterized** in that the side-bands are used as two linearly independent channels as in the quadrature phase I and Q arrangement of claim 9.
11. Method of claim 8 or 9, **characterized** in that when one band-pass filter is used, the signals formed in step b) are added before the filter.
12. Method of claim 8 or 9, **characterized** in that when two band-pass filters are used the signals are added after the band-pass filters.
13. Method of any of claims 9 - 12, **characterized** in that the filter(s) is/are (a) band-pass filter(s) rejecting distortion caused by the amplification.
14. Method of any of claims 1 - 13, **characterized** in

that in step a) there is formed a digital signal with two signal values.

15. Apparatus for generating a high-power modulated radio-frequency signal, comprising

5

a quantifier for pulse-forming of an information signal to form a digital signal having discrete signal values,

a radio-frequency carrier wave generator,

10

an amplification unit comprising switches for achieving a switched radio-frequency signal carrying the information, the switches being controlled by the information content of the digital signal,

15

a filter for achieving the desired signal,

**characterized** in that

the switches are connected to alternating radio-frequency carrier voltages generated by the carrier wave generator to cause mixing of the digital signals with a corresponding carrier signal, in accordance with a given information content of the digital signal.

20

25

16. Apparatus of claim 15, **characterized** in that the quantifier is a sigma-delta modulator.

17. Apparatus of claim 15 or 16, **characterized** in that the filter is a band-pass filter rejecting unwanted signals and distortion caused by the amplification.

30

18. Apparatus of any of claim 15 - 17, **characterized** in that the carrier wave generator is a transformer generating carrier waves of two different amplitudes.

35

40

45

50

55

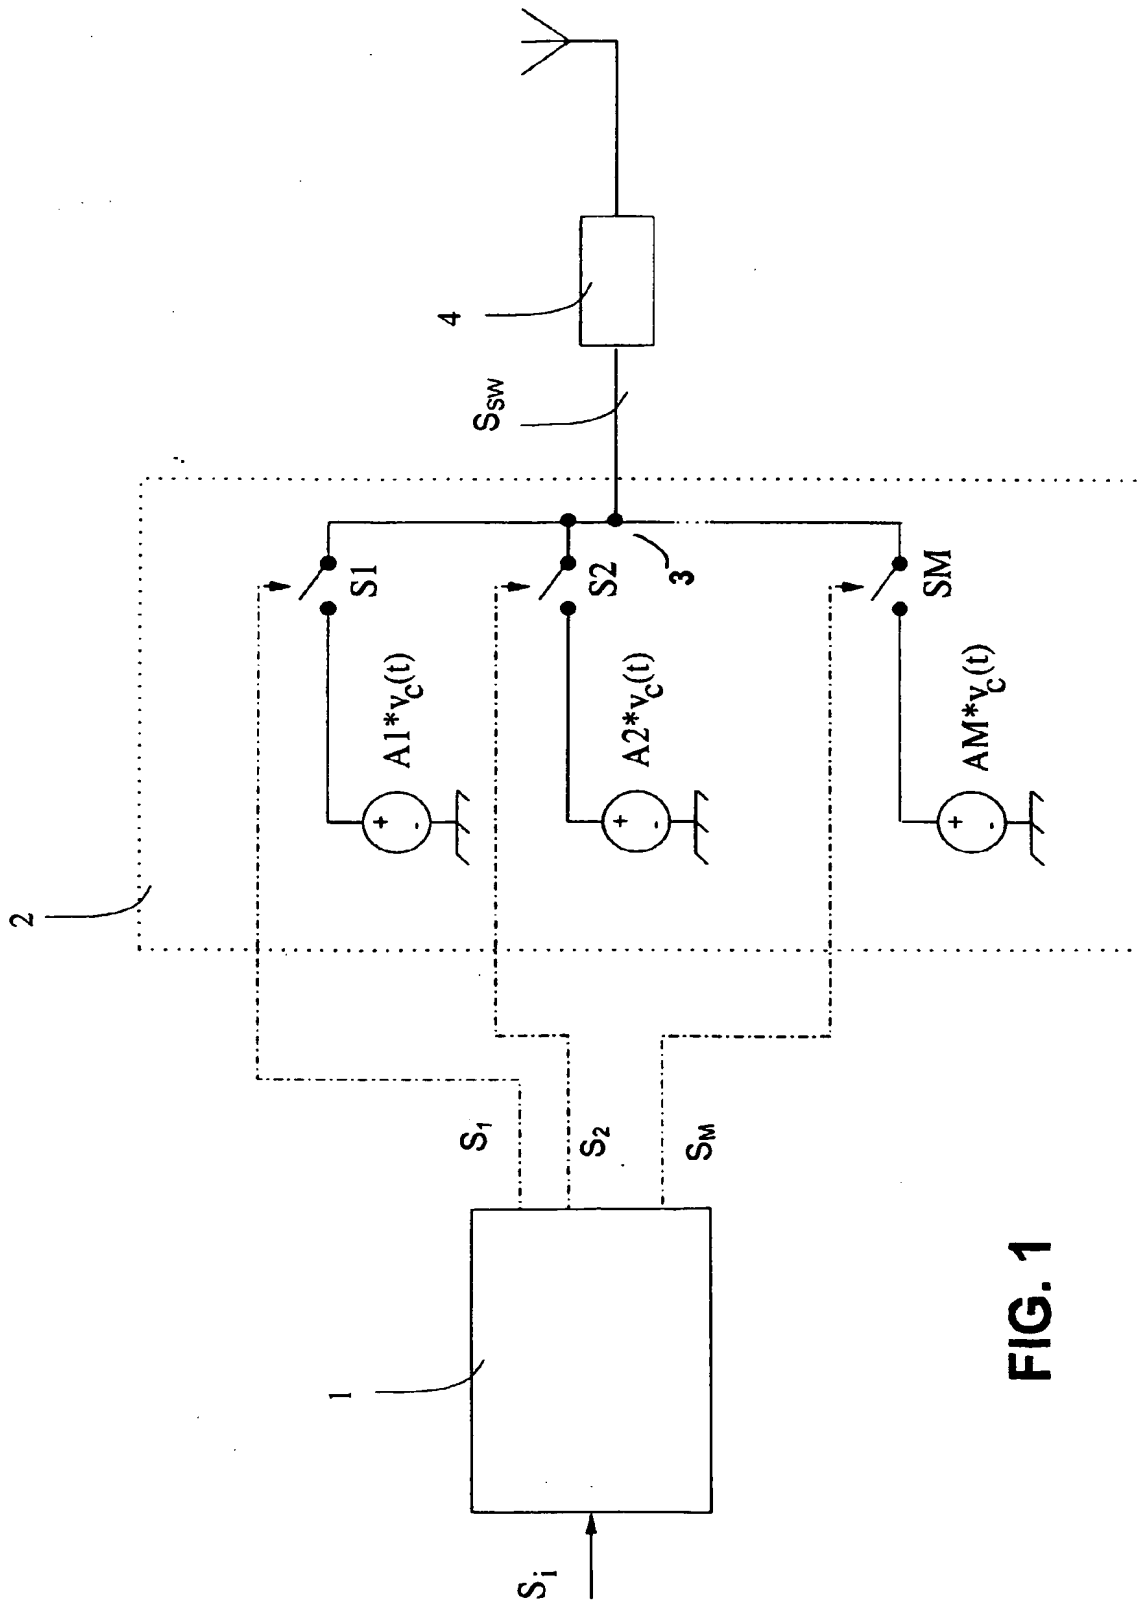


FIG. 1

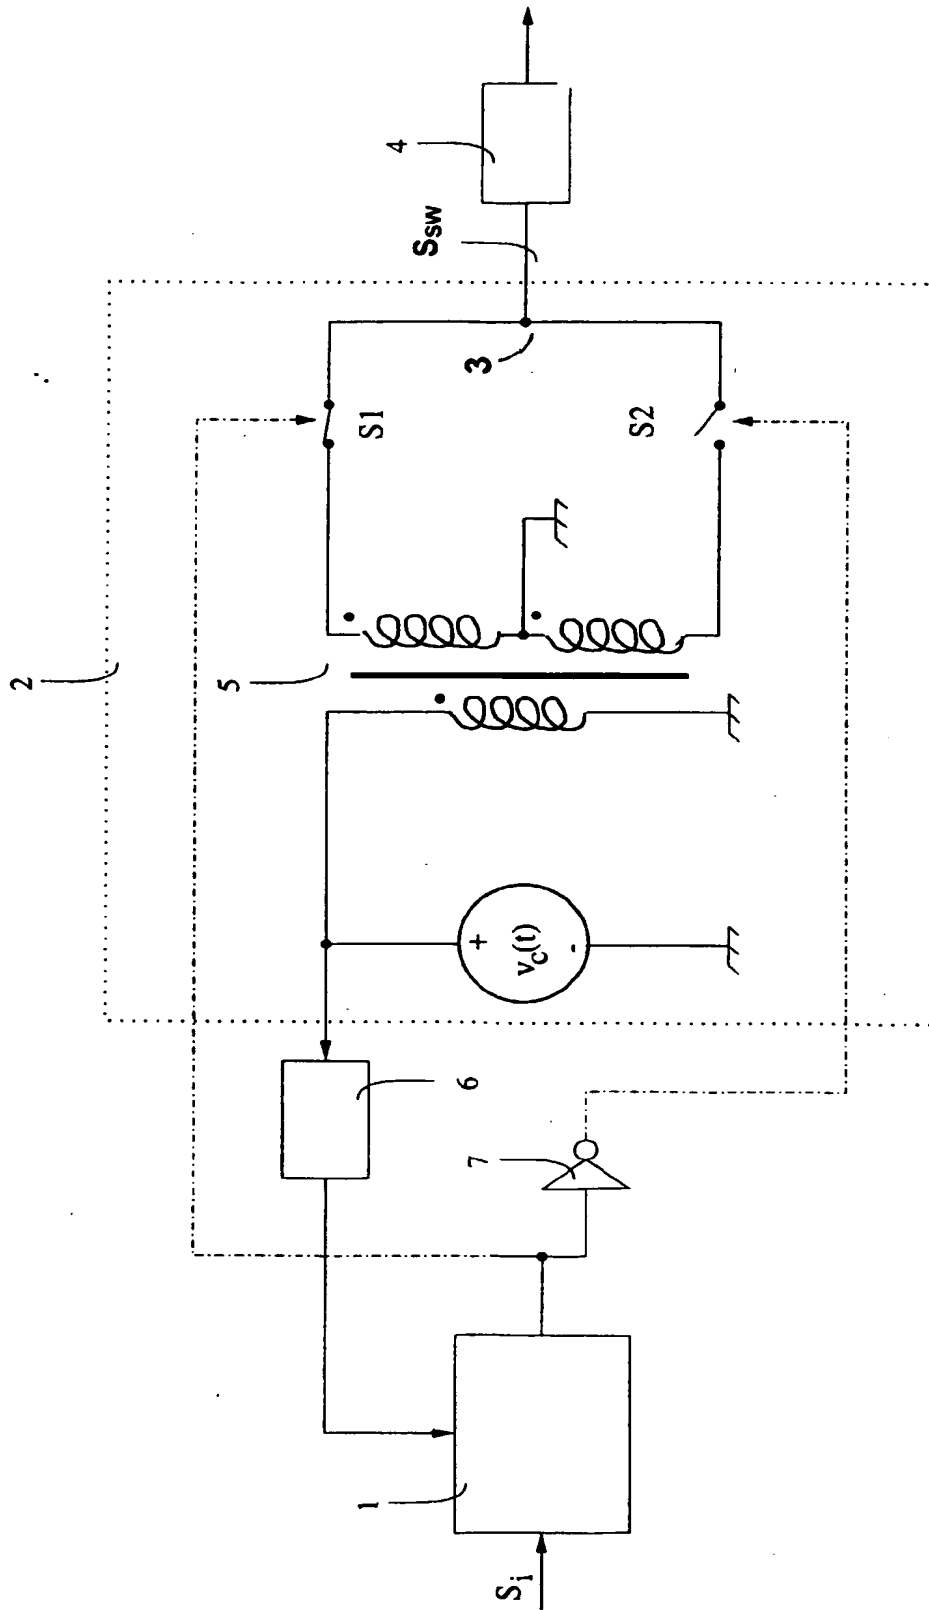


FIG. 2





European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 99 85 0172

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 426 560 A (MATRA COMMUNICATION) 8 May 1991 (1991-05-08)	1-3, 6, 9-11, 13-16	H04B1/04 H04L27/04 H04L27/20
A	* the whole document *	4, 5, 7, 12, 17, 18	H04L27/26 H03F3/217
X	US 5 450 444 A (MIKI NOBUYUKI ET AL) 12 September 1995 (1995-09-12)	1, 15, 17	
A	* abstract *	2-7, 9, 10, 14, 16, 18	
	* column 2, line 35 - column 5, line 61 *		
	* figure 2 *		
D, A	WO 98 11683 A (ERICSSON TELEFON AB L M) 19 March 1998 (1998-03-19)	1, 13-17	
	* abstract *		
	* page 3, line 16 - page 8, line 20 *		
	* page 12, line 3 - page 13, line 2 *		
	* figure 4 *		
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>13 April 2000</b>	Examiner <b>Lindhardt, U</b>
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date O : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04031)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 85 0172

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-04-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0426560 A	08-05-1991	FR 2653959 A	03-05-1991
		AT 110509 T	15-09-1994
		DE 69011811 D	29-09-1994
		DE 69011811 T	15-12-1994
		DK 426560 T	19-09-1994
		ES 2060986 T	01-12-1994
		HK 1004587 A	27-11-1998
		NO 303710 B	17-08-1998
		PT 95768 A, B	30-06-1992
US 5450444 A	12-09-1995	EP 0693843 A	24-01-1996
		JP 2809957 B	15-10-1998
		JP 6224641 A	12-08-1994
WO 9811683 A	19-03-1998	SE 507373 C	18-05-1998
		AU 4140297 A	02-04-1998
		CA 2262511 A	19-03-1998
		CN 1229546 A	22-09-1999
		EP 0914728 A	12-05-1999
		SE 9603256 A	07-03-1998

EPN FORM P0159

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82